

# SL-T0603GEC005-L40

## DATA SHEET

SPEC. NO. : SZ18051006  
DATE : 2018/05/10  
REV. : A/0

Approved By:



Checked By:

Prepared By:

## Features

- ◆ Pb free product—RoHS compliant
- ◆ Low power consumption, High efficiency
- ◆ Reliable and rugged
- ◆ Long life – solid state reliability
- ◆ Viewing Angle: 120°

## Package Dimension

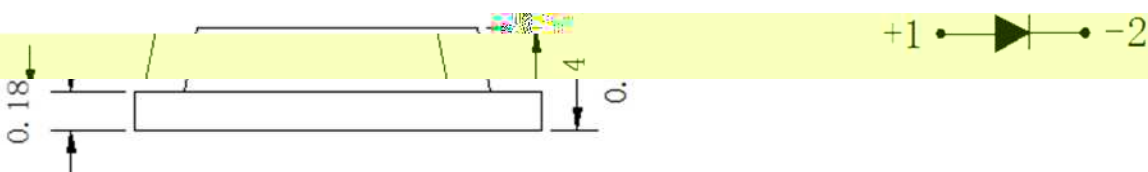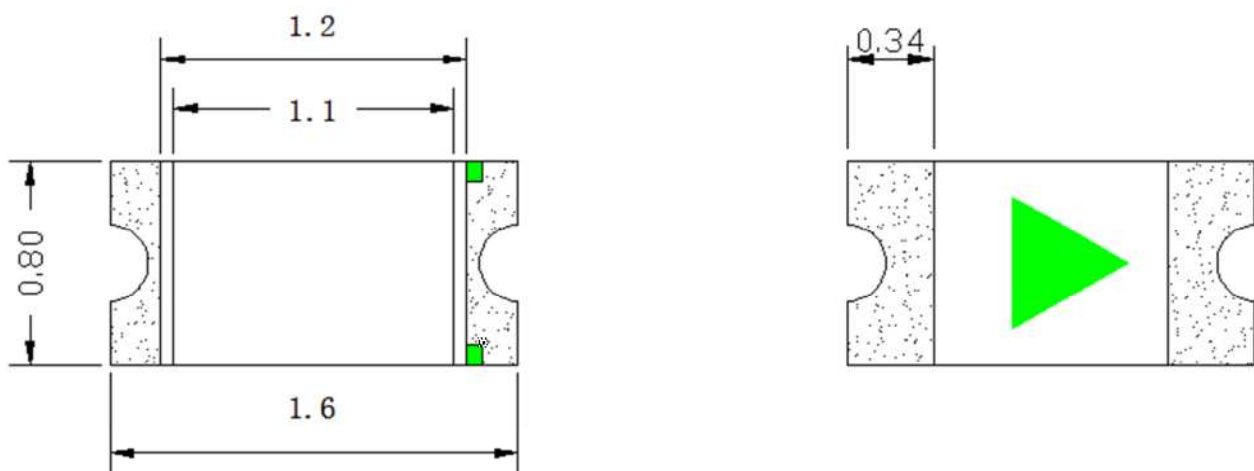

Part NO.	Lens Color	Source Color
SL-T0603GEC005-L40	Water Clear	Green

### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.10\text{mm}$  unless otherwise noted
3. Specifications are subject to change without notices.

### Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit
Power Dissipation	75	mW
Continuous Forward Current	25	mA
Peak Forward Current <sup>*2</sup>	60	mA
Reverse Voltage	5	V

### Electrical Optical Characteristics at Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	IV	200	---	400	mcd	I <sub>F</sub> =5mA (Note 1)
Viewing Angle	2 <sub>1/2</sub>	---	120	---	Deg.	(Note 2)
Dominant Wavelength	d	520	---	530	nm	I <sub>F</sub> =5mA
Peak Emission Wavelength	p	---	515	---	nm	I <sub>F</sub> =5mA
Spectral Line Half-Width		---	30	---	nm	---
Forward Voltage	V <sub>F</sub>	2.4	---	3.2	V	I <sub>F</sub> =5mA (Note 4)
Reverse Current	I <sub>R</sub>	---	---	10	μA	V <sub>R</sub> =5V

**Note:**

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity: ±15%.
2. <sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength, d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device. Tolerance of Dominant Wavelength: ±1.0nm.
4. Tolerance of Forward Voltage: ±0.1V.

**LIGHT**

LIGHT ELECTRONICS CO., L





## Label Explanation

**LIGHT**

Light Electronics CO., LTD.

RoHS

**LIGHT**

MODEL NAME: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

BIN: \_\_\_\_\_

PACKING DATE: \_\_\_\_\_


REMARKS: \_\_\_\_\_

## Reel Dimensions


**Note:** Tolerance unless mentioned is  $\pm 0.2\text{mm}$

**Part No.** SL-T0603GEC005-L40



## Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

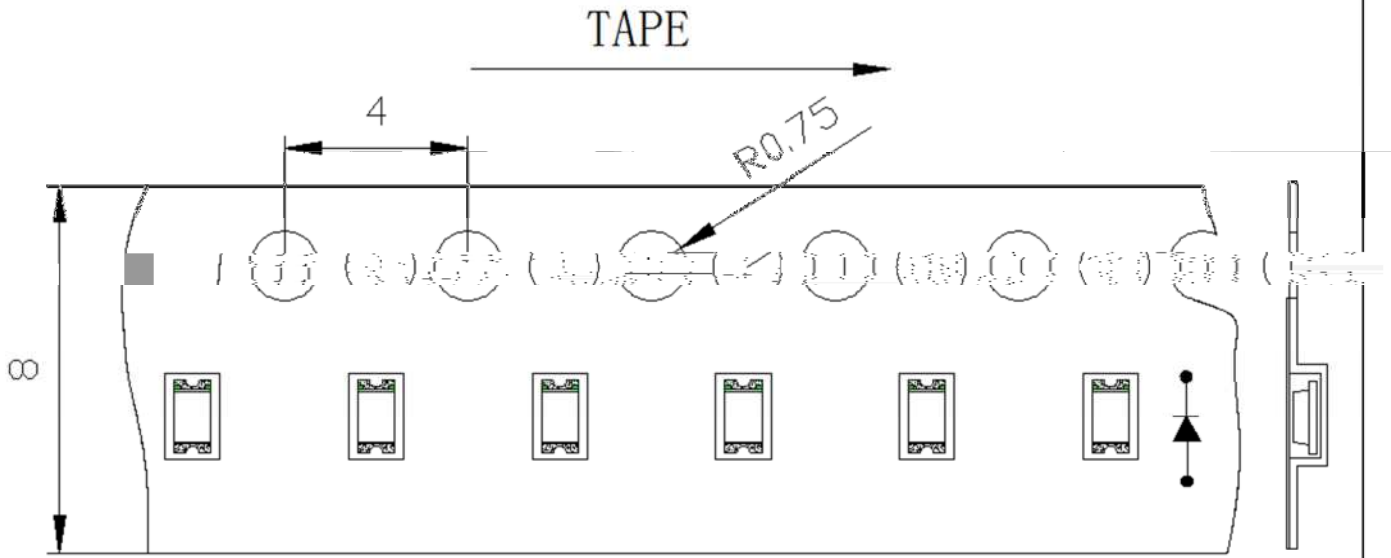



## Moisture Resistant Packaging



LIGHT universal Label




Aluminum moisture-proof bag



Customer defined Label or LIGHT universal Label

## Suggest IR Reflow Condition For Lead Free

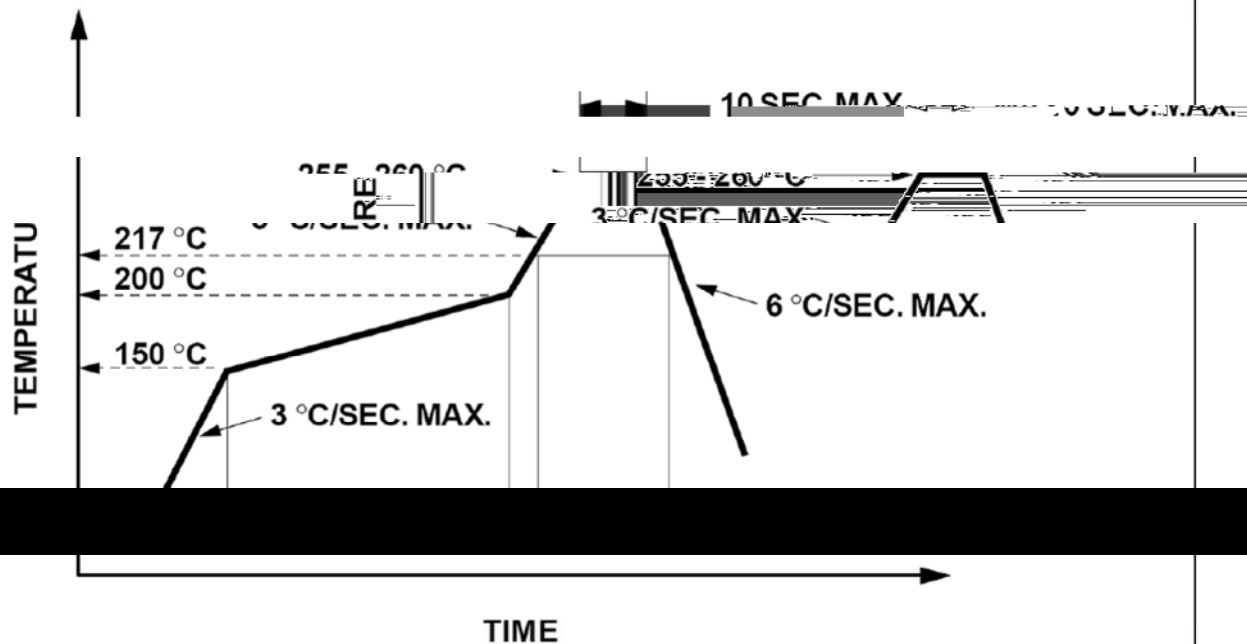

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

## Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

## Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

